



Double speed
as standard

FARMER

MULTIUSE



Hydraulic cylinder with
a unique position for
transport and for work

Two ergonomically positioned levers
activate **the splitting phase**

Sensor for blocking
the hydraulic flow

Rear lights bar
for road traffic
in rest position



Side protection, with lifting hook
support integrated, for long and
short logs (EN 609-1:2017)

Foldable at the end of work

**Log fixing
device**
(Exclusive THOR
system)



While both hands of the operator are
engaged on the control levers, the log
is held by the temporary fixing device
which unlocks automatically during the
splitting phase through the release of the
spring when in contact with the cutter

Side hoist included (EN 609-1:2017) mounted on the left
side of the machine with dual function for fall arrest
protection, equipped with hook for resting.



FARMER > 13 ton
MAGIK > 18 ton
 16 ton



H max
 • 104 cm
 • 115 cm



min > max
 5 > 90 cm



Standard **Controls**

System LEADER



FARMER MAGIK MULTIUSE

MODEL	FARMER MULTIUSE		MAGIK MULTIUSE	
Splitting height / Cutter stroke	104 / 94 cm		115 / 105 cm (adjustable)	
Controls	Standard		System LEADER	
Splitting force	13 ton	18 ton	16 ton	
ITEM No.	37.M.111	39.M.121	36.M.120	36.M.121
Power supply: VS = petrol / EL = electric	VS 3200 rpm	VS 3200 rpm	VS 3200 rpm	EL 400 Volt
Power required (HP / kW)	9 / 6.7	13 / 9.55	9 / 6.7	5.5 / 4
Working pressure (bar) DP = double pump	260 / DP	280 / DP	250 / DP	250
Hydraulic oil tank	18 lt	19 lt	23 lt	23 lt
1 st cutting speed (cm/sec)	8	6	6	4.5
2 nd cutting speed (cm/sec)	25	14	14	10.5
Return speed (cm/sec)	11.5	11	11	8.5
Rotation speed in rpm	3200	3200	3200	1400
Side hoist (EN 609-1:2017)	■	■	■	■
Rear lights bar	■	■	■	■
Mud guards	■	■	■	■
Towing hook	■	■	■	■
Public road homologation	*	*	*	*
Working dimensions (L x W x H) cm	290 x 122 x 263		290 x 122 x 268	
Weight (kg)	464	494	558	558
Price				
OPTIONAL ACCESSORIES				
Description	Lifting hook		Digital hour meter	Spare wheel
Item No.	845.201		400.113.K	845.157.K
All models	*		*	*
Price				

Shipping Dimensions / Weights: pages 36-37 ■ = Included as standard // * = Optional

Hydraulic vertical log splitters

Trailed and approved for public roads

NB: Public road homologation on demand



Towing hook approved for Ø 50 ball.
Stabilizer wheel

Pneumatic wheels (4.50.10.C)

Plastic Mudguards

Lights bar for road traffic



Anti-rollover stabilizing feet

Spare wheel (OPTIONAL)



Tipping from transport to work position



»»expedition
DATA


DIMENSIONS & WEIGHTS

Shipping dimensions (overall dimensions in cm) // Pallet Weight


ALPINO»



EL version




VS version

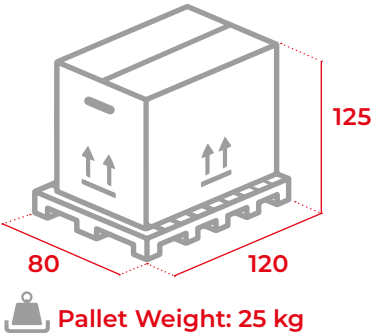


MIGNON»




EL version + HVP



VS version + KOMBI

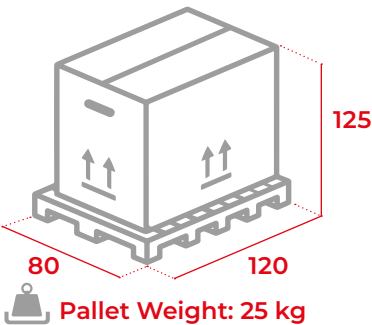


FARMER»

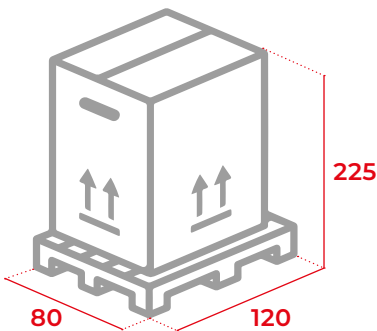

Pallet Weight: 25 kg

FARMER
DIAVOLIK»

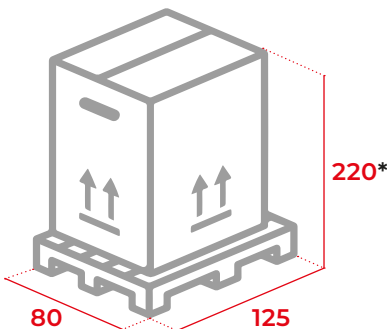

Pallet Weight: 25 kg

*(With optional winch mounted: H = 230 cm)


Hydraulic LOG SPLITTERS

Shipping dimensions (overall dimensions in cm) // Pallet Weight


MAGIK >>



Only **VS** version (Petrol)
Mod. 18 ton

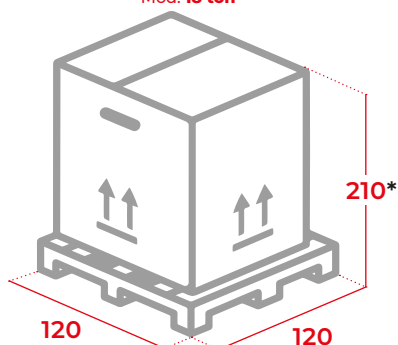


All other versions
Mod. 13 / 18 / 20 ton

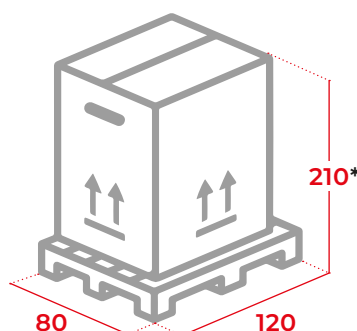

Pallet Weight:
25 kg

*(With optional
winch mounted:
H = 218 cm)


DIAVOLIK STOP >>
and GO!

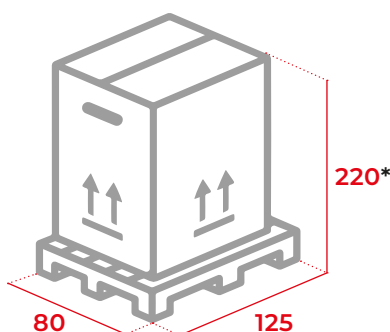

Pallet Weight:
25 kg


*(With optional
winch mounted:
H = 230 cm)

FARMER MULTISE >>

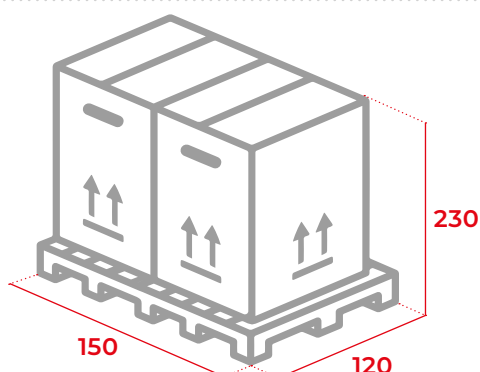

Pallet Weight:
25 kg

MAGIK MULTISE >>

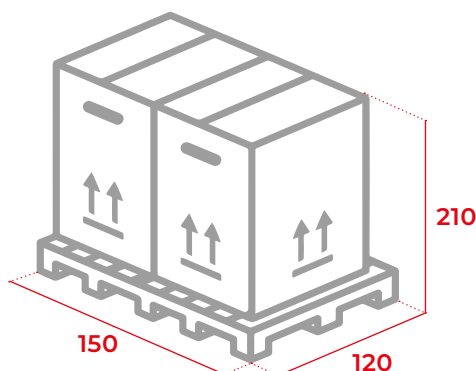

Pallet Weight:
25 kg