

OTHER MACHINES OF OUR PRODUCTION

VERTICAL LOG SPLITTERS:

ALPINO	6.5-8.5 ton / Splitting height 54 cm		EASY LINE family
MIGNON <small>ECO // PROF</small>	9-11 ton / Splitting height 54 cm		
FARMER	13-15-18 ton / Splitting height: 104 cm		FARMER family
FARMER DIAVOLIK	22-25-30 ton / Splitting height: 124 cm		
MAGIK	13-18-20 ton / Splitting height: 124 cm		TOP LINE family
DIAVOLIK <small>STOP and GO!</small>	25-30 ton / Splitting height: 123 cm		
FARMER <small>MULTIUSE</small>	13-18 ton / Splitting height: 104 cm		MULTI USE family
MAGIK <small>MULTIUSE</small>	16 ton / Splitting height: 115 cm		

CUT-SPLIT-LOAD:

MAGIKA UNIVERSAL  
SERIES

12 - 16 - 18 ton / Cutting Ø 32-38 cm  
Conveyor belt: 2.50 - 4 - 5 m to be  
choiced

DRUM SAW MACHINE:

REVOLVER  
SERIE

Exclusive "Andrea's last system"  
Cutting Ø 18 cm with widia blade  
2 loading channels + 1 for cutting



RICCA ANDREA & C. snc

12022 Busca - ITALY  
Via Vecchia di Cuneo, 57

Tel. +39.0171.946709

www.thor-italy.com  
vendite@thor-italy.com



From 1977  
MAKE INNOVATION IS OUR PASSION

700 // 750

# KATANA

Mod. Ø 22 / 28 cm  
Mod. Ø 30 cm



EL  
Electric  
Engine

Kombi  
Electric +  
Tractor

V.PF  
Fixed PTO  
Pump

VS  
Petrol  
Engine



# TANDEM

Mod. Ø 30 cm



EL  
Electric  
Engine

V.PF  
Fixed PTO  
Pump

Kombi  
Electric +  
Tractor




From 1977  
MAKE INNOVATION IS OUR PASSION

SAW  
Benches

max Ø 28 cm (Katana 700)  
max Ø 30 cm (Katana 750)



Ø 600 - 700 mm (Katana 700)  
Ø 750 mm (90 teeth - Katana 750)



**KATANA**

VERSIONS  
AVAILABLE

**EL** Electric Engine   **V.PF** Fixed PTO Pump   **Kombi** Electric + Tractor   **VS** Petrol Engine

MODEL	KATANA 700				KATANA 750			
Max. cutting diameter	Ø 22 cm		Ø 28 cm		Ø 30 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 600 mm		Ø 700 mm		Ø 750 mm			
Blade revs (rpm)	1600		1400		1400			
ITEM No.	K70.100	K70.101	K70.102	K70.103	K75.101	K75.103	K75.104	K75.105
Power supply	EL (S1) 230 Volt	EL (S1) 230 Volt	EL (S1) 400 Volt	V.PF 450 rpm	V.PF 540 rpm	EL (S6) 400 Volt	Kombi EL 400 V+V.PF	VS 3200 rpm
Power required (HP / kW)	3 / 2.2	3 / 2.2	5 / 3.7	11 / 8	25 / 18	12 / 9	7.5 / 5.5 - 25 / 18	13 / 9.55
Flywheel mounted on the electric engine	*	■	*	□	□	□	□	□
Blade stop brake	■	■	■	■	■	■	■	■
3-point connector 1 <sup>st</sup> - 2 <sup>nd</sup> cat.	□	□	□	■	■	■	■	---
Cut adjuster	■	■	■	■	■	■	■	■
Side foldable logs feed	---	---	---	---	■	■	■	■
Full wheels (Ø mm)	300	300	300	300	400	400	400	400
Working dimensions (W x L x H) cm	110 x 130 x 115			110 x 130 x 110	170 x 170 x 120			170 x 215 x 120
Weight (kg)	130	142	133	131	257	325	300	350
Price								



**Saw bench with conveyor belt for industrial and agricultural use!**

Manual winch for height positioning of conveyor belt ①

Hydraulic conveyor belt ②

Emergency braking device for models with PTO (Exclusive THOR system) ③

Safety cover of the cutting area (Exclusive THOR system) ④

Belt extraction by manual winch ⑤

Side feed mounted on bearings, with vertical rest position for transport ⑥




Handle height adjustment for the action of the bench ⑦

Lever for unlocking the bench movement (Exclusive THOR system) ⑧

Stabilizing foot, retractable for storage ⑨

**KATANA 700**

**KATANA 750**

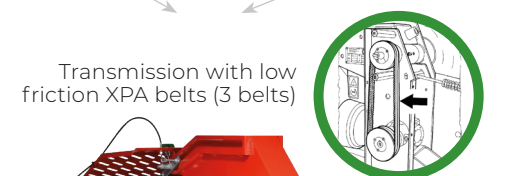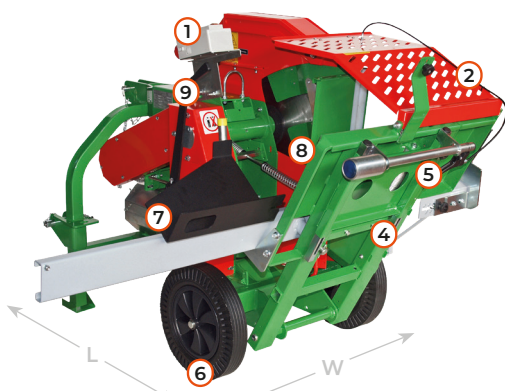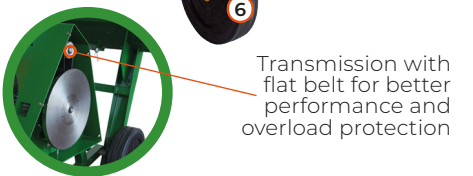

Switch with release coil, thermal protection and brake ①

Safety cover of the cutting area (Exclusive THOR system) ②

Support for logs being cutted ③

Handle height adjustment for the action of the bench ④

Lever for unlocking the bench movement (Exclusive THOR system) ⑤

Full transport wheels ⑥

Side feed mounted on bearings ⑦

Supporting logs swinging bench with insider anti rolling device ⑧

Emergency braking device for models with PTO (Exclusive THOR system) ⑨

Transmission with aluminum gearbox for tractor model ⑩

**OPTIONAL:** Cardan shaft ⑪

3-point connector 1<sup>st</sup> - 2<sup>nd</sup> cat. ⑫

SAW BENCHES / EN / THOR

Ask us for information on OPTIONAL ACCESSORIES

VERSIONS AVAILABLE

**EL** Electric Engine   **V.PF** Fixed PTO Pump   **Kombi** Electric + Tractor

Ø 30 cm



Ø 750 mm (90 teeth)



**TANDEM**

MODEL	TANDEM			
Max. cutting diameter	Ø 30 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 750 mm			
Blade revs (rpm)	1400			
Conveyor belt	4 m		5 m	
Width x Length	0.25 x 3.70 m		0.25 x 4.70 m	
Max. discharge height at 45°	2.40 m ~		3.10 m ~	
ITEM No.	K76.101	K76.103	K76.104	K76.111
Power supply	V.PF 540 rpm	EL (S6) 400 Volt	Kombi (EL + V.PF)	V.PF 540 rpm
Power required (HP / kW)	25 / 18	12 / 9	7.5 / 5.5 - 25 / 18	25 / 18
Blade stop brake	■	■	■	■
3-point connector 1 <sup>st</sup> - 2 <sup>nd</sup> cat.	■	■	■	■
Cut adjuster and discharge conveyor for conveyor belt	■	■	■	■
Side foldable logs feed	■	■	■	■
Transport height with closed belt (m)	2.50	2.50	2.50	3.50
Working dimensions (W x L x H) cm	170 x 450 x 250 (with belt at 45° / 4 m)			
Weight (kg)	500	510	550	530
Price				