



max  
Ø 28 cm



Ø 600 mm  
Ø 700 mm



# KATANA<sup>700</sup>

MODEL	KATANA 700				
Max. cutting diameter	Ø 22 cm	Ø 28 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 600 mm	Ø 700 mm			
Blade revs (rpm)	1600	1400			
ITEM No.	K70.100	K70.101	K70.102	K70.103	K70.104
Power supply: <b>EL</b> = electric (SI), <b>V.PF</b> = tractor, <b>VS</b> = gasoline	<b>EL</b> 230 Volt	<b>EL</b> 230 Volt	<b>EL</b> 400 Volt	<b>V.PF</b> 450 rpm	<b>VS</b> 1400 rpm
Power required (HP / kW)	3 / 2.2	3 / 2.2	5 / 3.7	11 / 8	9 / 6,7
Flywheel mounted on the electric engine	*	■	*	□	□
Blade stop brake	■	■	■	■	■
3-point connector 1 <sup>st</sup> - 2 <sup>nd</sup> cat.	□	□	□	■	□
Cut adjuster	■	■	■	■	■
Full wheels (dia. mm)	300	300	300	300	300
Working dimensions (L x W x H cm)	110 x 130 x 115	110 x 130 x 115	110 x 130 x 115	110 x 130 x 110	100 x 135 x 110
Weight (kg)	130	142	133	131	180
<b>Price</b>					

■ = Included as standard // □ = Not available // \* = Optional

Shipping Dimensions / Weights: page 46

OPTIONAL ACCESSORIES					
Description	Steel blade		Flywheel	Thrust roller	Cardan shaft
Item No.	DA.600.30	DA.700.30	D.280.19	D.60.120	600.059
<b>K70.100</b>	*	---	*	*	□
<b>K70.101</b>	---	*	■	*	□
<b>K70.102</b>	---	*	*	*	□
<b>K70.103</b>	---	*	□	*	*
<b>K70.104</b>	---	*	□	*	□
<b>Price</b>					

# Super compact for private use!


KATANA » 700



Switch with release coil, thermal protection and brake


Safety cover of the cutting area  
*(Exclusive THOR system)*

Transmission with flat belt for better performance and overload protection




Exceptional performance for 230 Volt model with 700 mm dia. blade thanks to the flywheel

Lever for unlocking the bench movement  
*(Exclusive THOR system)*



Handle height adjustment for the action of the bench



Oscillating bearings mounted on the fulcrum

Full transport wheels 300 dia., as standard

Multipurpose extension for:

Support for logs being cutted

Handle for short distances



Cutting length adjustment



Transmission with aluminum gearbox for tractor model

Support for cardan shaft

### OPTIONAL

Cardan shaft. *ITEM No. 600.059*

3-point connector 1<sup>st</sup> - 2<sup>nd</sup> cat. for tractor models



Supporting logs swinging bench with insider anti rolling device

Emergency braking device for models with PTO  
*(Exclusive THOR system)*




# SAW BENCHES

Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700




**EL / V.PF** versions

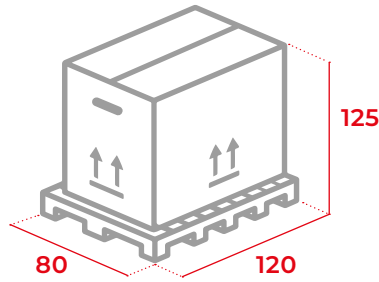

Pallet Weight: 25 kg

**VS** version

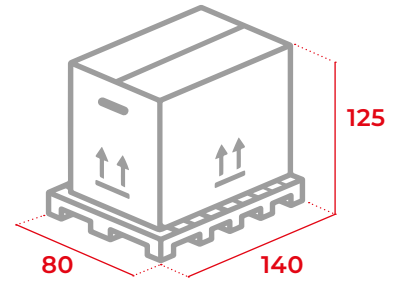


Pallet Weight: 25 kg

KATANA »750




**V.PF / EL / KOMBI** versions

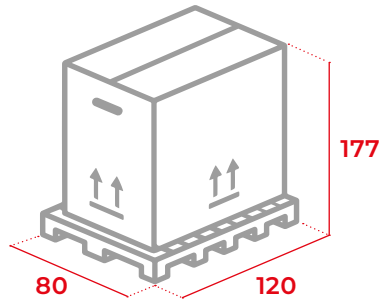


Pallet Weight: 25 kg

**VS** version

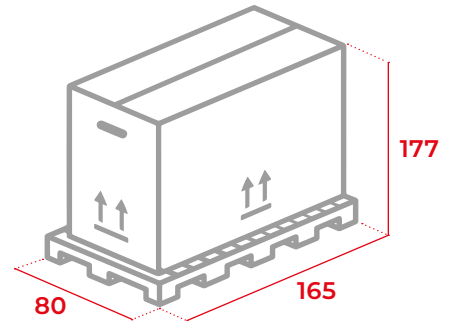

Pallet Weight: 25 kg

TANDEM »

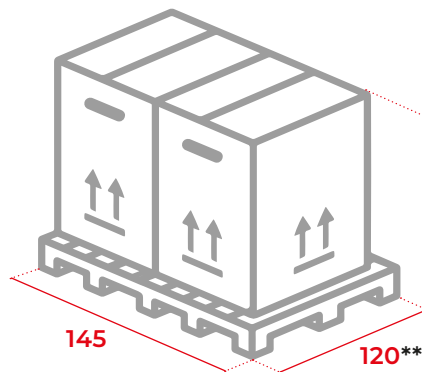

**Pallet Weight:**  
25 kg

**\*V.PF version - Cod. 76.III:**

- Saw benches height = 215 cm
- Belt dimensions = 340 x 70 x 70 cm

**\*\*EL version - Cod. 76.103:**

- Packaging depth = 128 cm

250\*

145

120\*\*