


max
Ø 30 cm



Ø 750 mm
(90 teeth)





KATANA⁷⁵⁰

MODEL	KATANA 750			
Max. cutting diameter	Ø 30 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 750 mm			
Blade revs (rpm)	1400			
ITEM No.	K75.101	K75.103	K75.104	K75.105
Alimentation: EL = electric (S6), V.PF = tractor, Kombi , VS = gasoline	V.PF 540 rpm	EL 400 Volt	Kombi (EL 400 V + V.PF)	VS 3200 rpm
Power required (HP / kW)	25 / 18	12 / 9	7.5 / 5.5 - 25 / 18	13 / 9.55
Blade stop brake	■	■	■	■
3-point connector 1 st - 2 nd cat.	■	■	■	---
Cut adjuster and discharge conveyor for conveyor belt	■	■	■	■
Side foldable logs feed	■	■	■	■
Full wheels (Ø mm)	400	400	400	400
Working dimensions (W x L x H cm)	170 x 170 x 120			170 x 215 x 120
Weight (kg)	257	325	300	350
Price				

■ = Included as standard // □ = Not available // * = Optional


Shipping Dimensions / Weights: page 46

OPTIONAL ACCESSORIES				
Description	Steel blade	Thrust roller	Pneumatic wheels Ø 400	Cardan shaft with safety bolt
Item No.	DA.750.30	D.60.120	200.193.K	600.125
Electric	*	*	*	□
Tractor	*	*	*	*
Kombi	*	*	*	* (V.PF)
Price				

Great stability for industrial and agricultural use!




KATANA » 750

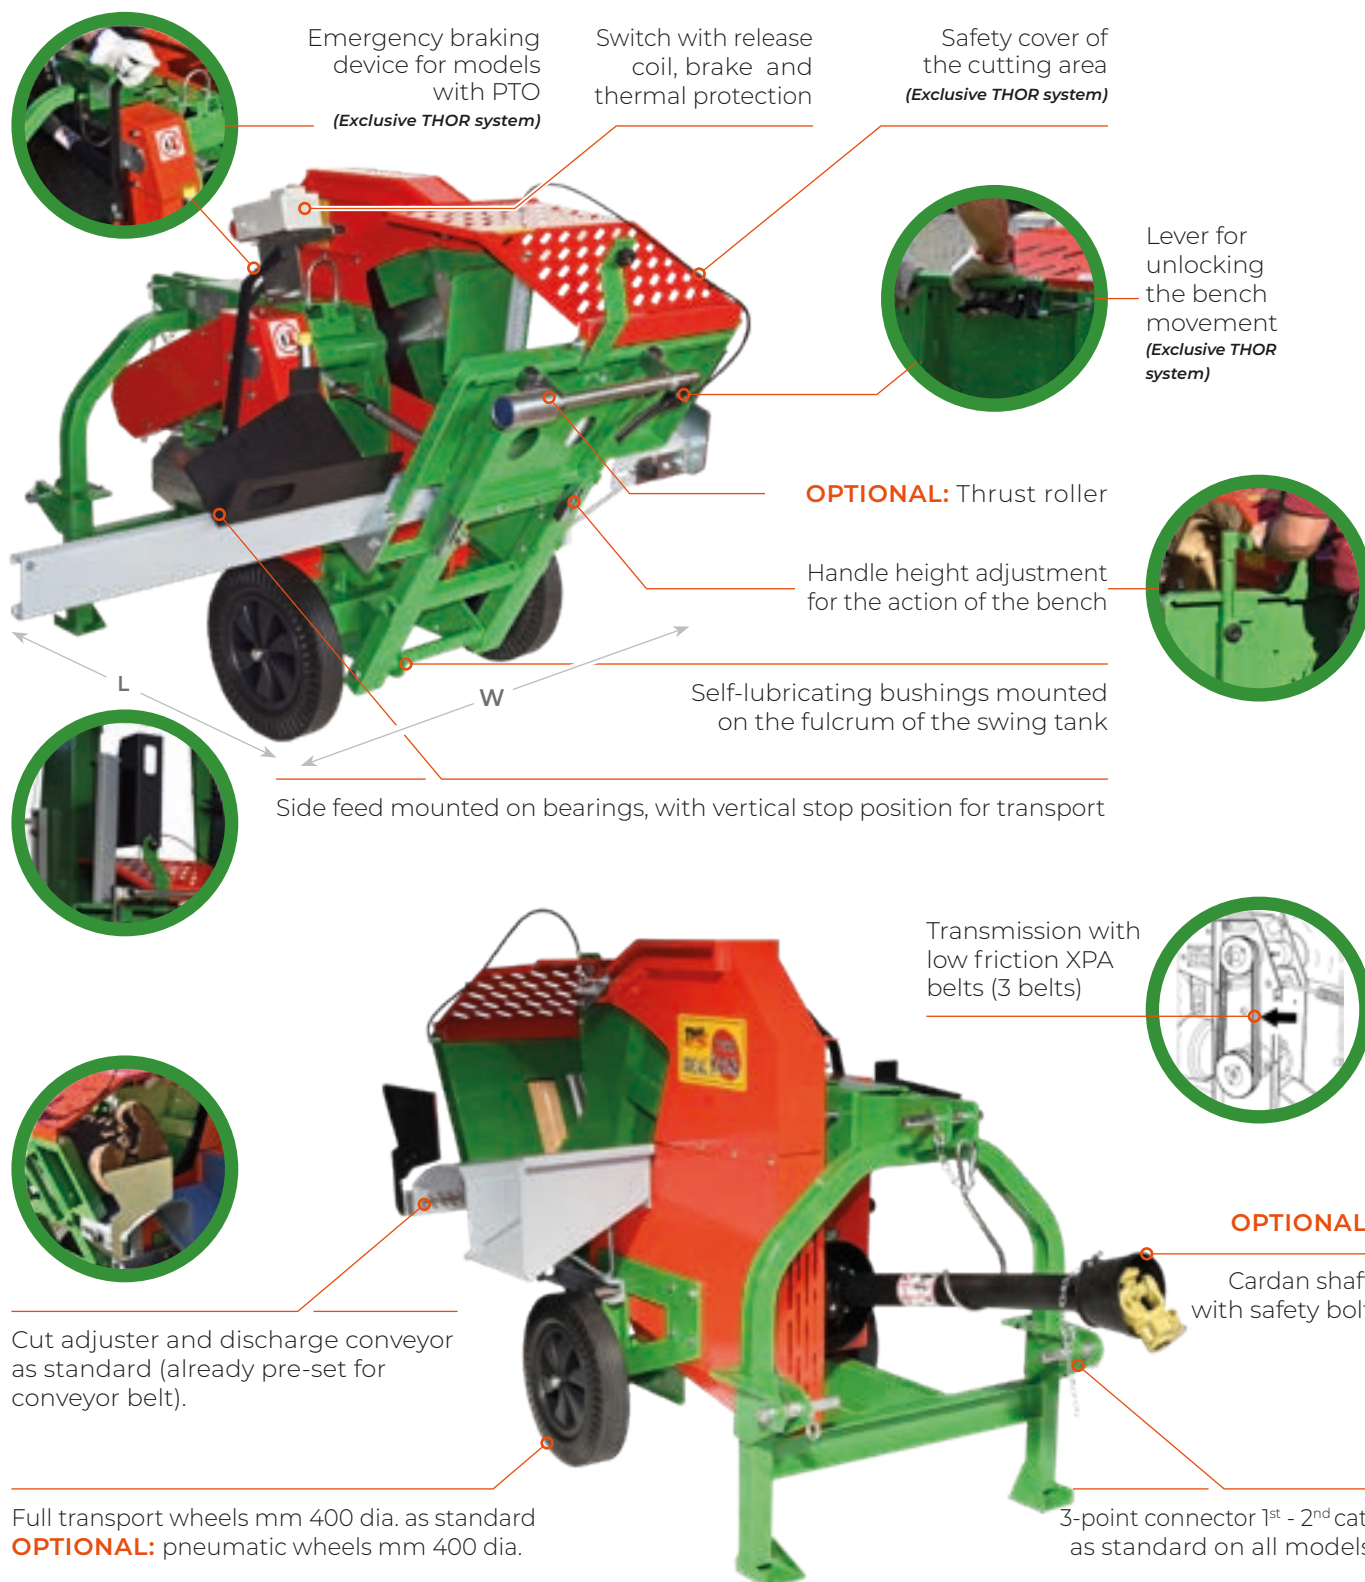

SAW BENCHES

Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700

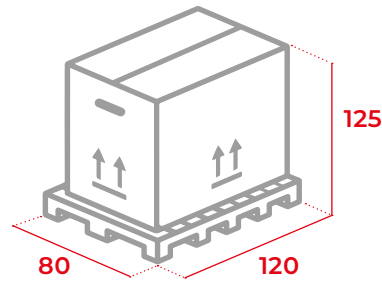


 Pallet Weight: 25 kg


V.PF / EL / KOMBI versions

VS version

KATANA »750

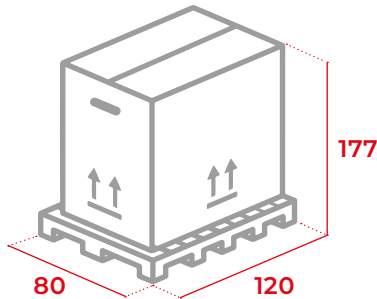


 Pallet Weight: 25 kg

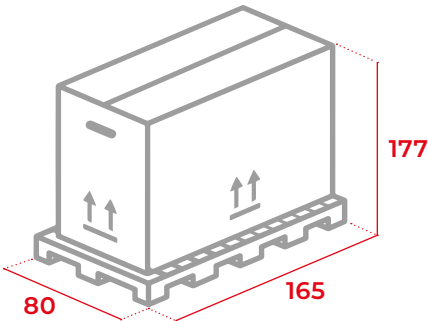

 Pallet Weight: 25 kg

TANDEM »

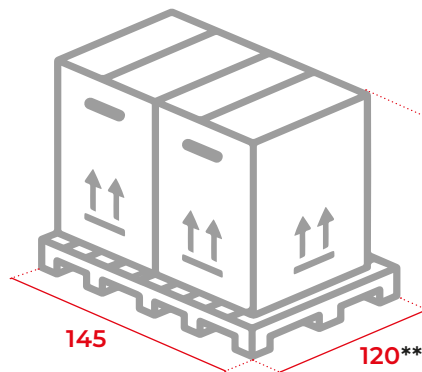


Pallet Weight:
25 kg

***V.PF version - Cod. 76.III:**

- Saw benches height = 215 cm
- Belt dimensions = 340 x 70 x 70 cm

****EL version - Cod. 76.103:**

- Packaging depth = 128 cm