


max
Ø 30 cm



Ø 750 mm
(90 teeth)




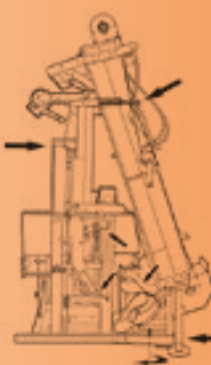


TANDEM

MODEL	TANDEM			
Max. cutting diameter	Ø 30 cm			
Widia sawblade hole 30 mm dia. <u>included</u>	Ø 750 mm			
Blade revs (rpm)	1400			
Conveyor belt	4 m		5 m	
Width x Length	0.25 x 3.70 m		0.25 x 4.70 m	
Max. discharge height at 45°	2.40 m ~		3.10 m ~	
ITEM No.	K76.101	K76.103	K76.104	K76.111
Power supply saw benches and belt: V.PF = tractor, EL = electric (S6), Kombi	V.PF 540 rpm	EL 400 Volt	Kombi (EL + V.PF)	V.PF 540 rpm
Power required (HP / kW)	25 / 18	12 / 9	7.5 / 5.5 - 25 / 18	25 / 18
Blade stopping brake	■	■	■	■
3-point connector 1 st - 2 nd cat.	■	■	■	■
Cut adjuster and discharge conveyor for conveyor belt	■	■	■	■
Side Foldable logs feed	■	■	■	■
Transport height with closed belt (m)	2.50	2.50	2.50	3.50
Working dimensions (W x L x H cm)	170 x 450 x 250 (with belt at 45° / 4 m)			
Weight (kg)	500	510	550	530
Price				


■ = Included as standard // □ = Not available * = Optional

Shipping Dimensions / Weights: page 46


OPTIONAL ACCESSORIES				
Description	Cardan shaft with safety bolt	Speed adjuster for belt	Extension kit for 5 m belt not assembled (Tandem: 4 m)	
Item No.	600.125	853.033.K	853.020.K	
Tractor (V.PF)	*	*	*	
Electric	□	*	*	
Price				Transport position

Saw bench with conveyor belt for industrial and agricultural use!

TANDEM»



Manual winch for height positioning of conveyor belt



Cut adjuster and discharge for conveyor belt



Hydraulic conveyor belt



Emergency braking device for models with PTO

(Exclusive THOR system)

Safety cover of the cutting area
(Exclusive THOR system)

Belt extraction by manual winch



Side feed mounted on bearings, with vertical rest position for transport



Handle height adjustment for the action of the bench



Lever for unlocking the bench movement
(Exclusive THOR system)




Stabilizing foot, retractable for storage



SAW BENCHES

Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700

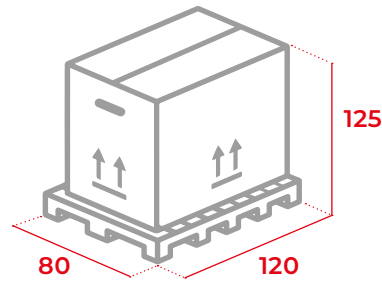


Pallet Weight: 25 kg


V.PF / EL / KOMBI versions

VS version

KATANA »750

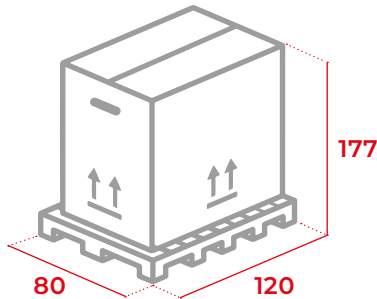


Pallet Weight: 25 kg

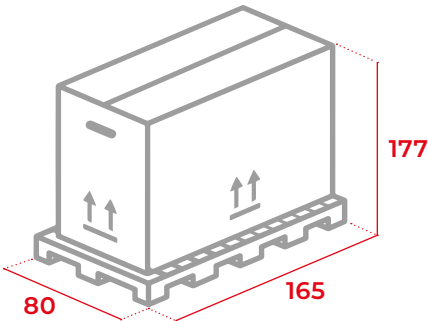

Pallet Weight: 25 kg

TANDEM »

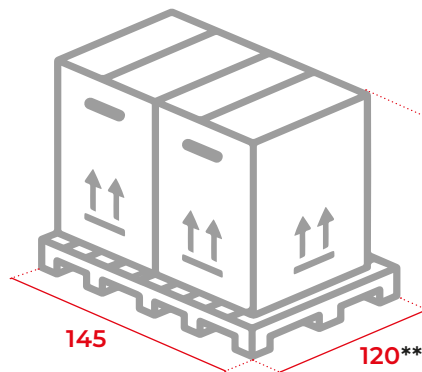

Pallet Weight:
25 kg

***V.PF version - Cod. 76.III:**

- Saw benches height = 215 cm
- Belt dimensions = 340 x 70 x 70 cm

****EL version - Cod. 76.103:**

- Packaging depth = 128 cm