

25 ton
30 ton

max
123 cm

max
100 cm

STOP
andGO!

DIAVOLIK

STOP
and
GO!






MODEL	DIAVOLIK STOPandGO!			
Splitting height / Cutter stroke	123 cm / 113 cm			
Hydraulic oil tank	38 lt (Internal tank)	85 lt (External tank)		
Splitting force	25 ton	30 ton		
ITEM No.	46.100	46.101	46.102	46.103
Power supply EL = electric, V.PF = tractor, Kombi = EL + V.PF	V.PF 540 rpm max.	V.PF 540 rpm max.	EL 400 Volt	Kombi EL 400V + V.PF
Power required (HP / kW)	46 / 34	50 / 37	7.5 / 5.5	7.5 / 5.5 - 50 / 37
Working pressure (bar) <i>DP = double pump</i>	260	315	315 / DP	315 (DP x EL)
1 st cutting speed (cm/sec)	8	8	8	8 / 8
2 nd cutting speed (cm/sec)	16.8	16.8	17.4	17.4 / 16.8
Return speed (cm/sec)	14.6	14.6	15.1	15.1 / 14.6
Rotation speed in rpm	450	450	1400	1400 / 450
3-point connector 1 st - 2 nd cat.	■	■	■	■
Wheels (Ø mm)	□	□	□	□
Working dimensions (W x L / H = 316 cm)	110 x 140	110 x 140	110 x 140	110 x 140
Weight (kg)	630	678	688	715
Price				

■ = Included as standard // □ = Not available

Shipping Dimensions / Weights: page 39

OPTIONAL ACCESSORIES (For descriptions and technical data see page 31)

				
Lifting hook	Cardan shaft	Timber tong		
			Winch Pulling force: 400 kg	Pulley to pull from the bottom
Chainsaw holder	Board 50 cm with pedal, extension and container			

Hydraulic vertical log splitters

Splitter with high sturdiness and stability for industrial and agricultural use!



OPTIONAL

Manual or remote controlled winch. They can drag logs from a distance of 20 meters.

12 Volt electric controls unique and with exclusive **STOPandGO!** system



Side hoist included (EN 609-1:2017) mounted on the left side of the machine with dual function for fall arrest protection. Foldable at the end of work



Hydraulic cylinder retractable for storage. H = 215 cm



Electric control for the return stroke of the cutter

Safety sensor and lever protector

Tempered and high strength steel cutter, with a length of 30 cm and 6° inclined cut for a greater penetration and less effort

Interchangeable, bolted GS400 cast iron cutter guides

OPTIONAL

Lifting hook

Double side protection, with lifting hook support integrated, mounted on the right side of the machine for both long and short logs (EN 609-1:2017) Foldable at the end of work


DIAVOLIK STOPandGO! >>

MAGIK >>




Only VS version (Petrol)

Mod. 18 ton

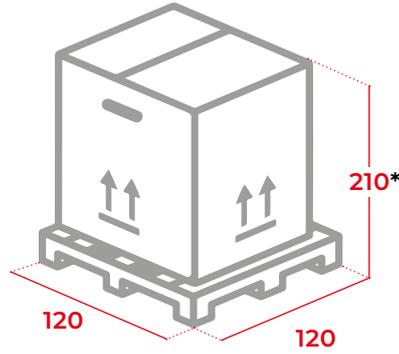

All other versions


Mod. 13 / 18 / 20 ton

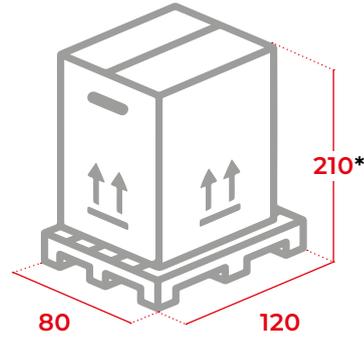

Pallet Weight: 25 kg

*(With optional winch mounted: H = 218 cm)


MAGIK >>
EVOLUTION

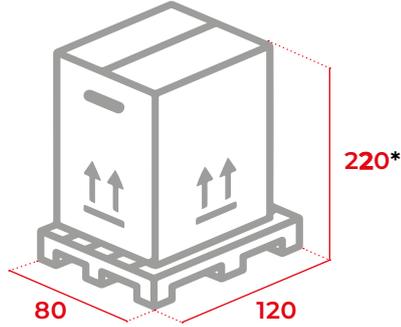

Pallet Weight: 25 kg

*(With optional winch mounted: H = 218 cm)


DIAVOLIK STOP >>
andGO!

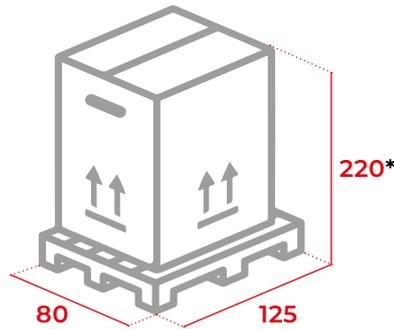

Pallet Weight: 25 kg


*(With optional winch mounted: H = 230 cm)

FARMER MULTISE >>

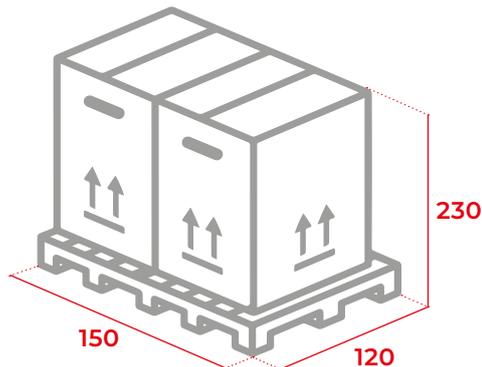

Pallet Weight: 25 kg

MAGIK MULTISE >>

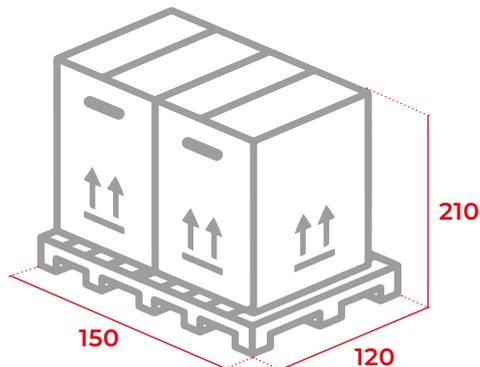

Pallet Weight: 25 kg