

# FARMER

## MULTIUSE



Double speed  
as standard

Hydraulic cylinder with  
a unique position for  
transport and for work

Sensor for blocking  
the hydraulic flow

Rear lights bar  
for road traffic  
in rest position

Two ergonomically positioned levers  
activate **the splitting phase**



Side protection, with lifting hook  
support integrated, for long and  
short logs (EN 609-1:2017)

Foldable at the end of work

Log fixing  
device  
(Exclusive THOR  
system)



While both hands of the operator are  
engaged on the control levers, the log  
is held by the temporary fixing device  
which unlocks automatically during the  
splitting phase through the release of the  
spring when in contact with the cutter

Side hoist included (EN 609-1:2017) mounted on the left  
side of the machine with dual function for fall arrest  
protection, equipped with hook for resting. >>>



FARMER > 13 ton  
MAGIK > 18 ton  
16 ton



H max  
• 104 cm  
• 115 cm



min > max  
5 > 90 cm



Standard Controls

System LEADER



# FARMER MAGIK MULTIUSE

MODEL	FARMER MULTIUSE		MAGIK MULTIUSE	
Splitting height / Cutter stroke	104 / 94 cm		115 / 105 cm (adjustable)	
Controls	Standard		System LEADER	
Splitting force	13 ton	18 ton	16 ton	
ITEM No.	37.M.111	39.M.121	36.M.120	36.M.121
Power supply: VS = petrol / EL = electric	VS 3200 rpm	VS 3200 rpm	VS 3200 rpm	EL 400 Volt
Power required (HP / kW)	9 / 6.7	13 / 9.55	9 / 6.7	5.5 / 4
Working pressure (bar) DP = double pump	260 / DP	280 / DP	250 / DP	250
Hydraulic oil tank	18 lt	19 lt	23 lt	23 lt
1 <sup>st</sup> cutting speed (cm/sec)	8	6	6	4.5
2 <sup>nd</sup> cutting speed (cm/sec)	25	14	14	10.5
Return speed (cm/sec)	11.5	11	11	8.5
Rotation speed in rpm	3200	3200	3200	1400
Side hoist (EN 609-1:2017)	■	■	■	■
Rear lights bar	■	■	■	■
Mud guards	■	■	■	■
Towing hook	■	■	■	■
Public road homologation	*	*	*	*
Working dimensions (L x W x H) cm	290 x 122 x 263		290 x 122 x 268	
Weight (kg)	464	494	558	558
Price				
OPTIONAL ACCESSORIES				
Description	Lifting hook	Digital hour meter	Spare wheel	
Item No.	845.201	400.113.K	845.157.K	
All models	*	*	*	
Price				

Hydraulic vertical log splitters

# Trailed and approved for public roads

*NB: Public road homologation on demand*



Towing hook approved for  $\varnothing$  50 ball.  
Stabilizer wheel

Pneumatic wheels (4.50.10.C)

Plastic Mudguards

Lights bar for road traffic



Anti-rollover stabilizing feet

Spare wheel (OPTIONAL)



Tipping from transport to work position




MAGIK >>




Only VS version (Petrol)

Mod. 18 ton

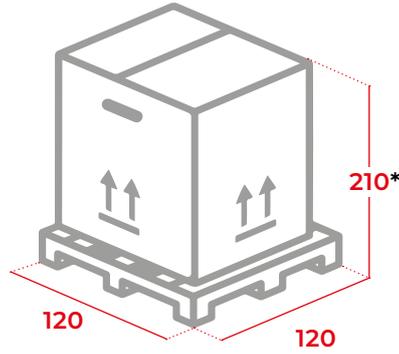

All other versions


Mod. 13 / 18 / 20 ton

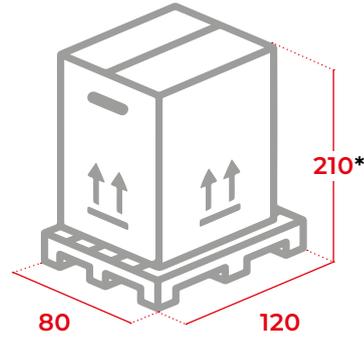

Pallet Weight: 25 kg

\*(With optional winch mounted: H = 218 cm)


MAGIK >>  
EVOLUTION

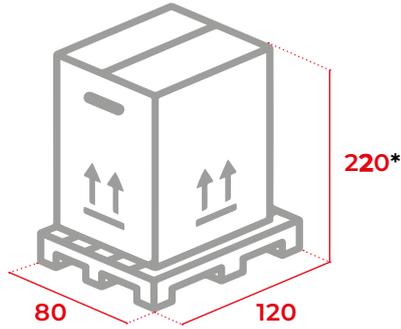

Pallet Weight: 25 kg

\*(With optional winch mounted: H = 218 cm)


DIAVOLIK STOP >>  
andGO!

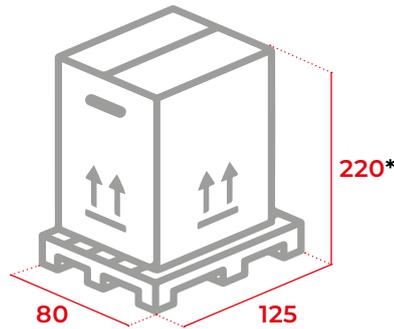

Pallet Weight: 25 kg


\*(With optional winch mounted: H = 230 cm)

FARMER MULTISE >>

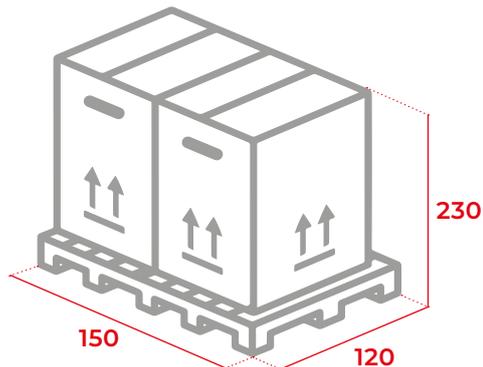

Pallet Weight: 25 kg

MAGIK MULTISE >>

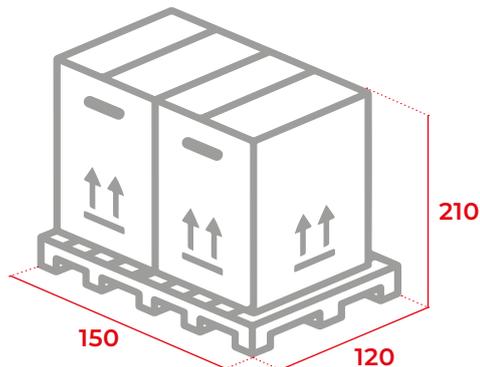

Pallet Weight: 25 kg