

max
Ø 28 cm



Ø 600 mm
Ø 700 mm




KATANA⁷⁰⁰

MODEL	KATANA 700				
Max. cutting diameter	Ø 22 cm	Ø 28 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 600 mm	Ø 700 mm			
Blade revs (rpm)	1600	1400			
ITEM No.	K70.100	K70.101	K70.102	K70.103	K70.104
Power supply: EL = electric (SI), V.PF = tractor, VS = gasoline	EL 230 Volt	EL 230 Volt	EL 400 Volt	V.PF 450 rpm	VS 1400 rpm
Power required (HP / kW)	3 / 2.2	3 / 2.2	5 / 3.7	11 / 8	9 / 6,7
Flywheel mounted on the electric engine	*	■	*	□	□
Blade stop brake	■	■	■	■	■
3-point connector 1 st - 2 nd cat.	□	□	□	■	□
Cut adjuster	■	■	■	■	■
Full wheels (dia. mm)	300	300	300	300	300
Working dimensions (L x W x H cm)	110 x 130 x 115	110 x 130 x 115	110 x 130 x 115	110 x 130 x 110	100 x 135 x 110
Weight (kg)	130	142	133	131	180
Price					

■ = Included as standard // □ = Not available // * = Optional

Shipping Dimensions / Weights: page 55

OPTIONAL ACCESSORIES					
Description	Steel blade		Flywheel	Thrust roller	Cardan shaft
Item No.	DA.600.30	DA.700.30	D.280.19	D.60.120	600.059
K70.100	*	---	*	*	□
K70.101	---	*	■	*	□
K70.102	---	*	*	*	□
K70.103	---	*	□	*	*
K70.104	---	*	□	*	□
Price					

Saw Benches

Super compact for private use!

KATANA » 700



Switch with release coil, thermal protection and brake

Transmission with flat belt for better performance and overload protection



Exceptional performance for 230 Volt model with 700 mm dia. blade thanks to the flywheel

Safety cover of the cutting area
(Exclusive THOR system)

Lever for unlocking the bench movement
(Exclusive THOR system)



Handle height adjustment for the action of the bench



Oscillating bearings mounted on the fulcrum

Full transport wheels 300 dia., as standard

Multipurpose extension for:

Support for logs being cutted

Handle for short distances



Cutting length adjustment



Transmission with aluminum gearbox for tractor model

Support for cardan shaft

Supporting logs swinging bench with insider anti rolling device

Emergency braking device for models with PTO
(Exclusive THOR system)

OPTIONAL

Cardan shaft. *ITEM No. 600.059*

3-point connector 1st - 2nd cat. for tractor models




Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700




EL / V.PF versions

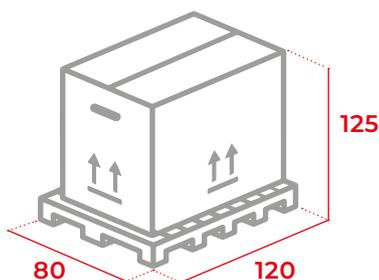

 Pallet Weight: 25 kg

VS version

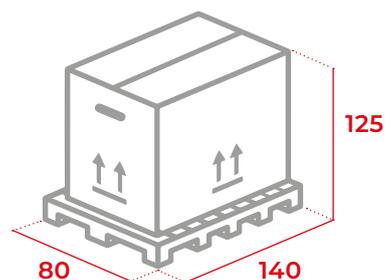


 Pallet Weight: 25 kg

KATANA »750




V.PF / EL / KOMBI / VS versions

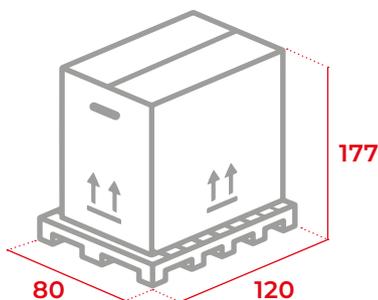

 Pallet Weight: 25 kg

TANDEM »

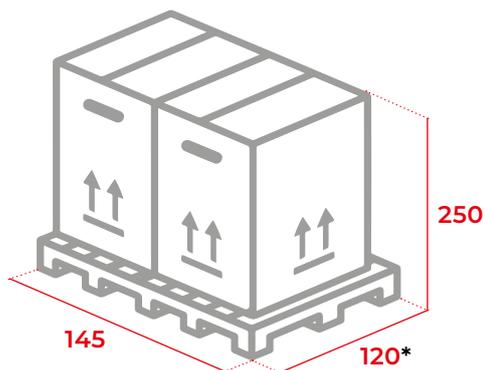


 Pallet Weight:
 25 kg

*EL version - Cod. 76.103:
 • Packaging depth = 128 cm