

max
Ø 30 cm



Ø 750 mm
(90 teeth)



KATANA 750

MODEL	KATANA 750			
Max. cutting diameter	Ø 30 cm			
Widia blade 30 mm dia. hole <u>included</u>	Ø 750 mm			
Blade revs (rpm)	1400			
ITEM No.	K75.101	K75.103	K75.104	K75.105
Alimentation: EL = electric (S6), V.PF = tractor, Kombi , VS = gasoline	V.PF 540 rpm	EL 400 Volt	Kombi (EL 400 V + V.PF)	VS 3200 rpm
Power required (HP / kW)	25 / 18	12 / 9	7.5 / 5.5 - 25 / 18	13 / 9.55
Blade stop brake	■	■	■	■
3-point connector 1 st - 2 nd cat.	■	■	■	---
Cut adjuster and discharge conveyor for conveyor belt	■	■	■	■
Side foldable logs feed	■	■	■	■
Full wheels (Ø mm)	400	400	400	400
Working dimensions (W x L x H cm)	170 x 170 x 120			170 x 215 x 120
Weight (kg)	257	325	300	350
Price				

■ = Included as standard // □ = Not available // * = Optional

Shipping Dimensions / Weights: page 55

OPTIONAL ACCESSORIES				
Description	Steel blade	Thrust roller	Pneumatic wheels Ø 400	Cardan shaft with safety bolt
Item No.	DA.750.30	D.60.120	200.193.K	600.125
Electric	*	*	*	□
Tractor	*	*	*	*
Kombi	*	*	*	* (V.PF)
Gasoline	*	*	*	□
Price				

Saw Benches

Great stability for industrial and agricultural use!



KATANA » 750

Emergency braking device for models with PTO
(Exclusive THOR system)

Switch with release coil, brake and thermal protection

Safety cover of the cutting area
(Exclusive THOR system)

Lever for unlocking the bench movement
(Exclusive THOR system)

OPTIONAL: Thrust roller

Handle height adjustment for the action of the bench

Self-lubricating bushings mounted on the fulcrum of the swing tank

Side feed mounted on bearings, with vertical stop position for transport

Transmission with low friction XPA belts (3 belts)

OPTIONAL: Cardan shaft with safety bolt

3-point connector 1st - 2nd cat. as standard on all models

Cut adjuster and discharge conveyor as standard (already pre-set for conveyor belt).


Full transport wheels mm 400 dia. as standard
OPTIONAL: pneumatic wheels mm 400 dia.

Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700




EL / V.PF versions

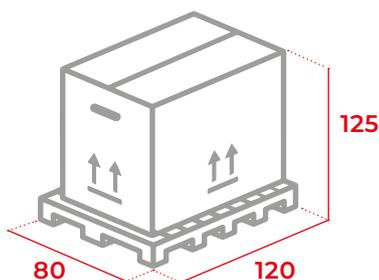

 Pallet Weight: 25 kg

VS version

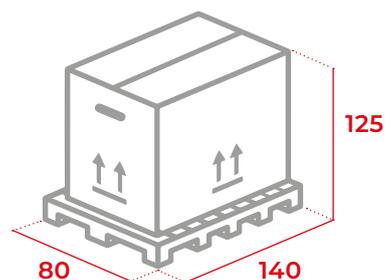


 Pallet Weight: 25 kg

KATANA »750




V.PF / EL / KOMBI / VS versions

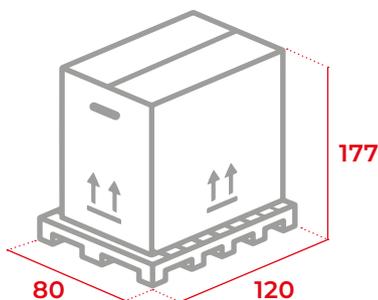

 Pallet Weight: 25 kg

TANDEM »

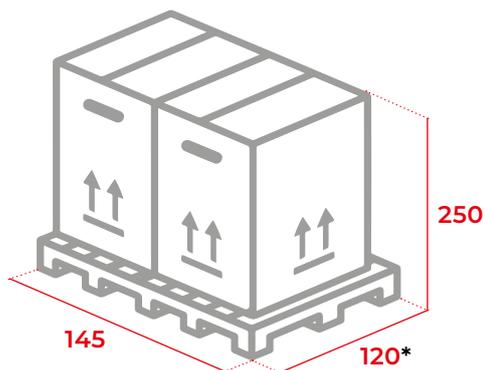


 Pallet Weight:
 25 kg

*EL version - Cod. 76.103:
 • Packaging depth = 128 cm