

## Hydraulic vertical log splitters

# MAGIK

## MULTIUSE

FARMER/MAGIK MULTIUSE



Hydraulic cylinder with a unique position for transport and for work

Two ergonomically positioned levers activate the splitting phase

Sensor for blocking the hydraulic flow

Rear lights bar for road traffic in rest position

Single control for log centering  
(Exclusive THOR system)



Interchangeable self-lubricating Teflon guides

Special steel cutter with inclined cut for greater penetration and less effort



Aluminium cutter stroke adjustment easily adjustable to the desired height

Very wide base for ergonomic support of the log to be split

Foldable at the end of work thanks to the rotatable support foot to minimize the machine size



ALL OUR **OPTIONALS**

pages 36-37

FARMER > 13 ton  
MAGIK > 18 ton  
16 ton



H max  
• 104 cm  
• 115 cm



min > max  
5 > 90 cm



Standard Controls

System LEADER



# FARMER MAGIK MULTIUSE

MODEL	FARMER MULTIUSE		MAGIK MULTIUSE	
Splitting height / Cutter stroke	104 / 94 cm		115 / 105 cm (adjustable)	
Controls	Standard		System LEADER	
Splitting force	13 ton	18 ton	16 ton	
ITEM No.	37.M.111	39.M.121	36.M.120	36.M.121
Power supply: VS = petrol / EL = electric	VS 3200 rpm	VS 3200 rpm	VS 3200 rpm	EL 400 Volt
Power required (HP / kW)	9 / 6.7	13 / 9.55	9 / 6.7	5.5 / 4
Working pressure (bar) DP = double pump	260 / DP	280 / DP	250 / DP	250
Hydraulic oil tank	18 lt	19 lt	23 lt	23 lt
1 <sup>st</sup> cutting speed (cm/sec)	8	6	6	4.5
2 <sup>nd</sup> cutting speed (cm/sec)	25	14	14	10.5
Return speed (cm/sec)	11.5	11	11	8.5
Rotation speed in rpm	3200	3200	3200	1400
Side hoist (EN 609-1:2017)	■	■	■	■
Rear lights bar	■	■	■	■
Mud guards	■	■	■	■
Towing hook	■	■	■	■
Public road homologation	*	*	*	*
Working dimensions (L x W x H) cm	290 x 122 x 263		290 x 122 x 268	
Weight (kg)	464	494	558	558
Price				
OPTIONAL ACCESSORIES				
Description	Lifting hook	Digital hour meter	Spare wheel	
Item No.	845.201	400.113.K	845.157.K	
All models	*	*	*	
Price				

Hydraulic vertical log splitters

# Trailed and approved for public roads

*NB: Public road homologation on demand*



Towing hook approved for  $\varnothing$  50 ball.  
Stabilizer wheel

Pneumatic wheels (4.50.10.C)

Plastic Mudguards

Lights bar for road traffic



Anti-rollover stabilizing feet

Spare wheel (OPTIONAL)



Tipping from transport to work position




**MAGIK** >>




Only **VS** version (Petrol)

Mod. **18 ton**

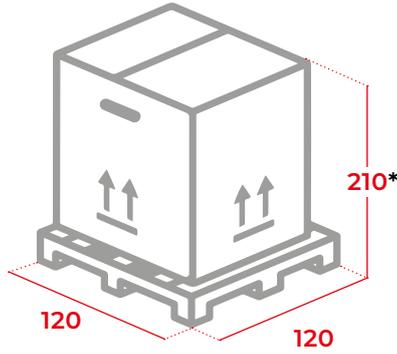

All other versions


Mod. **13 / 18 / 20 ton**

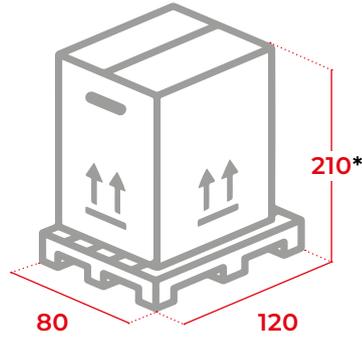

**Pallet Weight:**  
25 kg

*\*(With optional winch mounted:  
H = 218 cm)*


**MAGIK** >>  
**EVOLUTION**

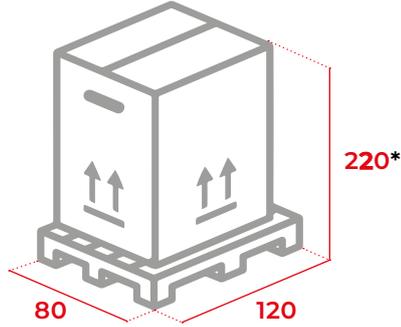

**Pallet Weight:**  
25 kg

*\*(With optional winch mounted:  
H = 218 cm)*


**DIAVOLIK** **STOP** >>  
*andGO!*

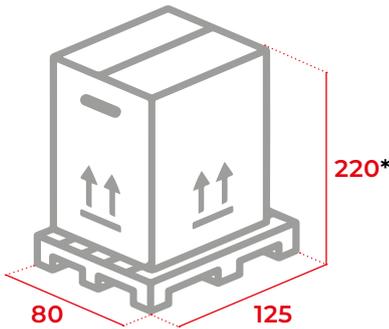

**Pallet Weight:**  
25 kg


*\*(With optional winch mounted:  
H = 230 cm)*

**FARMER** **MULTIUSE** >>

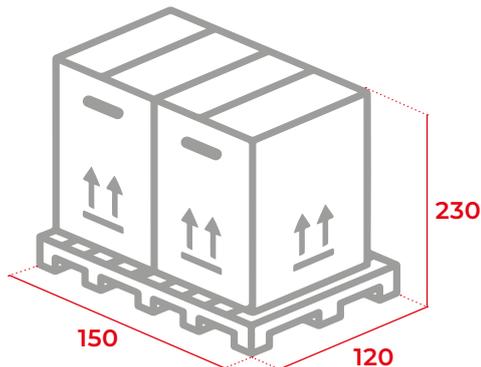

**Pallet Weight:**  
25 kg

**MAGIK** **MULTIUSE** >>

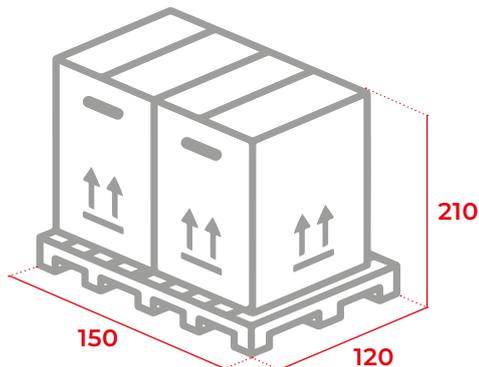

**Pallet Weight:**  
25 kg