

max
Ø 30 cm



Ø 750 mm
(90 teeth)





TANDEM

| MODEL | TANDEM | | | |
|--|---------------------|---------------------|--------------------|--------------------------|
| Max. cutting diameter | Ø 30 cm | | | |
| Widia sawblade hole 30 mm dia. <u>included</u> | Ø 750 mm | | | |
| Blade revs (rpm) | 1400 | | | |
| Conveyor belt | 4 m | 5 m | | |
| Width x Length | 0.25 x 3.70 m | 0.25 x 4.70 m | | |
| Max. discharge height at 45° | 2.40 m ~ | 3.10 m ~ | | |
| ITEM No. | K76.101 | K76.111 | K76.113 | K76.114 |
| Power supply saw benches and belt: EL = electric (S6), V.PF = tractor, Kombi | V.PF 540 rpm | V.PF 540 rpm | EL 400 Volt | Kombi (EL + V.PF) |
| Power required (HP / kW) | 25 / 18 | 25 / 18 | 12 / 9 | 7.5 / 5.5 - 25 / 18 |
| Blade stopping brake | ■ | ■ | ■ | ■ |
| 3-point connector 1 st - 2 nd cat. | ■ | ■ | ■ | ■ |
| Cut adjuster and discharge conveyor for conveyor belt | ■ | ■ | ■ | ■ |
| Side foldable logs feed | ■ | ■ | ■ | ■ |
| Transport height with closed belt (m) | 2.50 | 2.50 | | |
| Working dimensions (W x L x H cm) | 170 x 450 x 250 | 170 x 450 x 310 | | |
| Weight (kg) | 500 | 530 | 540 | 580 |
| Price | | | | |

■ = Included as standard // □ = Not available // * = Optional

Shipping Dimensions / Weights: page 55

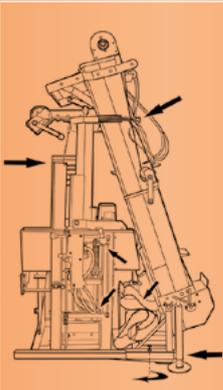
| OPTIONAL ACCESSORIES |  |  |  |
|-----------------------|---|--|---|
| Description | Cardan shaft with safety bolt | Speed adjuster for belt | |
| Item No. | 600.125 | 853.033.K | |
| Tractor (V.PF) | * | * | |
| Electric | □ | * | |
| Price | | | Transport position |

Saw bench with conveyor belt for industrial and agricultural use!

TANDEM»



Manual winch for height positioning of conveyor belt



Cut adjuster and discharge for conveyor belt



Hydraulic conveyor belt



Emergency braking device for models with PTO

(Exclusive THOR system)

Safety cover of the cutting area
(Exclusive THOR system)

Belt extraction by manual winch



Side feed mounted on bearings, with vertical rest position for transport

Handle height adjustment for the action of the bench

Lever for unlocking the bench movement
(Exclusive THOR system)

Stabilizing foot, retractable for storage




Shipping dimensions (overall dimensions in cm) // Pallet Weight

KATANA »700




EL / V.PF versions

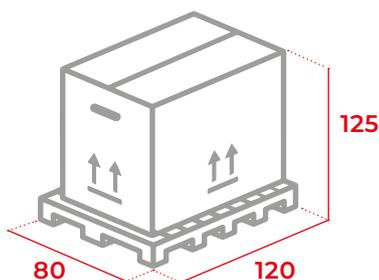

 Pallet Weight: 25 kg

VS version

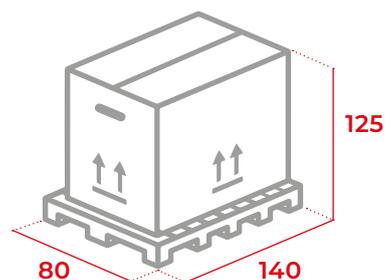


 Pallet Weight: 25 kg

KATANA »750




V.PF / EL / KOMBI / VS versions

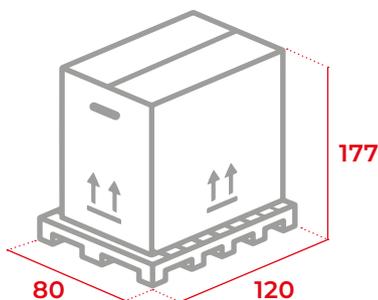

 Pallet Weight: 25 kg

TANDEM »

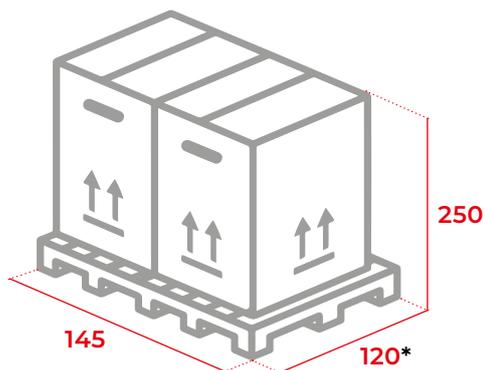


 Pallet Weight:
 25 kg

*EL version - Cod. 76.103:
 • Packaging depth = 128 cm