



Model:

AL-20

with

System
LEADER

A considered choice for every family

Their strength and simplicity will surprise you!

- They can cut large and difficult logs with a diameter up to 60 cm.
- They take up very little space. They are always ready for use and are very easy to use.
- They require no special maintenance.
- They are powerful but safe thanks to the “**System-LEADER**” controls on all versions.

With the “**System-LEADER**” controls you can carry out the cutter approach stroke and center the logs while the cutter is in motion with both hands free by using the pedal. Once the log is centered and blocked in the desired position the two control levers are used to split the log.

- They are available in EL version, 230 Volt single-phase or 400 Volt three-phase.
- They can be used with special cross cutters and 60° cutters to split straight filament logs (**optional**).
- A special side support will help to collect and support the split logs (**optional**).

Super-sturdy frame and cutter body.

CONTROLS:

Two ergonomically-positioned levers for the splitting phase.

OPTIONAL:

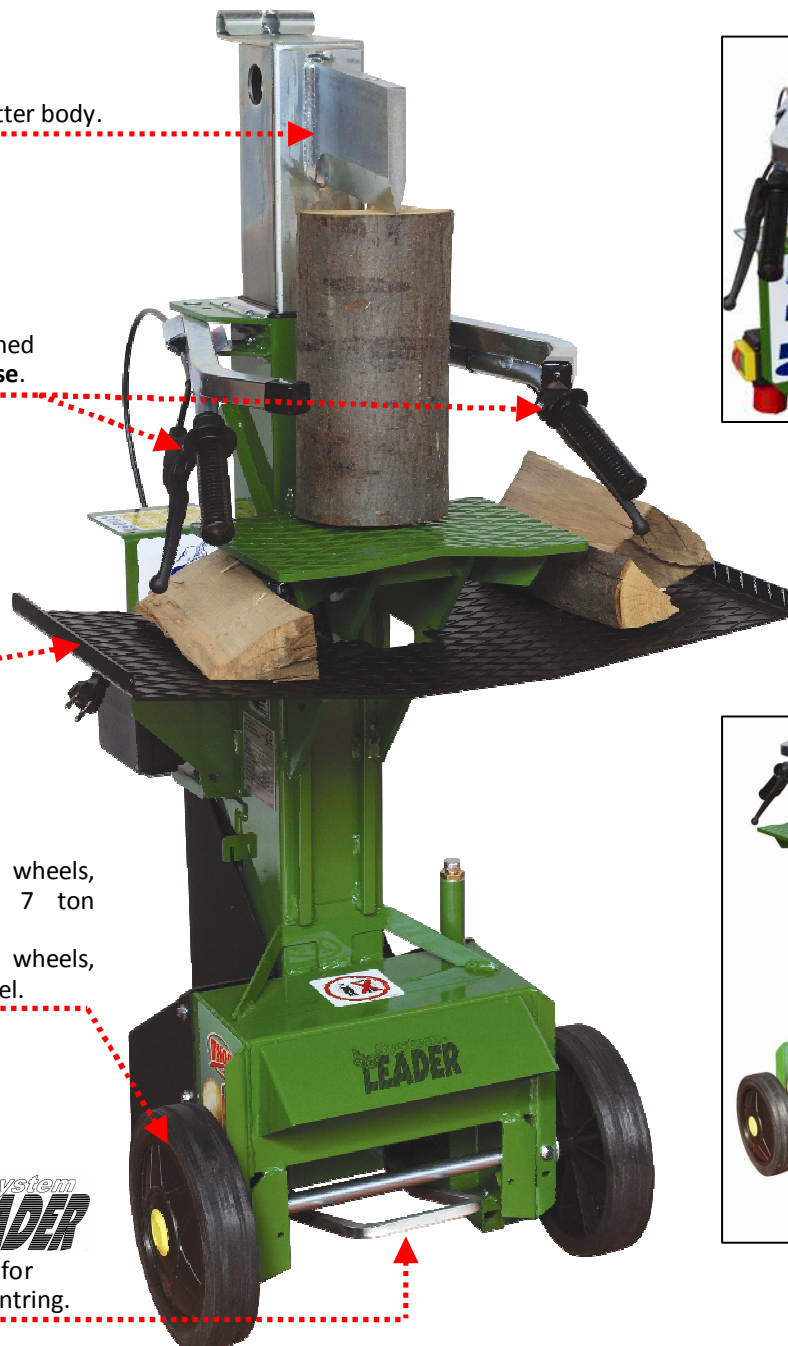
Side extensions for log support.
Code 800.109.K

TRANSPORT:

- 200 mm dia. semi-full wheels, standard on 6.5 and 7 ton models.
- 250 mm dia. semi-full wheels, standard on 8.5 ton model.

CONTROLS:

Approved pedal (standard) for approach stroke and log centring.



System
LEADER

6.5 / 7 / 8.5 ton HYDRAULIC VERTICAL LOG SPLITTERS






OPTIONAL:
Side extensions
Code 800.109.K



Model	Alpino	Alpino	Alpino	Alpino	Alpino
Cutting force	6.5 Ton	7 Ton	8.5 Ton	8.5 Ton	8.5 Ton
Power supply <i>EL</i> = electric motor	EL 230 Volt	EL 230 Volt	EL 230 Volt	EL 230 Volt	EL 400 Volt
Power required (HP / kW)	2.5 / 1.85	3 / 2.2	2.5 / 1.85	2.5 / 1.85	4 / 3
Max. cutting height (cm)	54	54	54	54-67-105	54-67-105
Adjustable cutting stroke (cm)	50	50	50	50	50
Working pressure (bar) <i>PD</i> = double pump	230	190	250 / PD	250 / PD	250
1 st cutting speed (cm/sec)	3.2	2.2	10	10	5.3
2 nd cutting speed (cm/sec)	--	--	1.8	1.8	--
Return speed (cm/sec)	15.2	15.2	12.3	12.3	36
Hydraulic oil tank capacity (lt)	6	6	6	6	6
Weight (kg)	98	100	110	118	118
Shipment dimensions (AxBxH cm)	60x80x120	60x80x120	60x80x120	60x80x120	60x80x120
Rear control cover	☐	☐	●	●	●
Wheel size (mm dia.) <i>full</i>	200	200	250	250	250
"System-LEADER" controls with pedal included	●	●	●	●	●
List price excl. VAT (€)					
Net price excl. VAT (€)					
★ = delivery time: 4 weeks		★			★
Code	AL.225.80.TF	AL.223.TF	AS.225.80.PD.TF	AS.225.80.PD	AS.384.90

☐ = NO ● = YES TF = Fixed Table

OPTIONAL ACCESSORIES for all models			
Description	60° cutter	Cross cutter	Side extensions
Code	800.087.K	835.027.K	800.109.K
List price excl. VAT (€)			
Net price excl. VAT (€)			