



Model:




with




*A sure and innovative choice looking to the future!*

With a large selection of models and optionals.

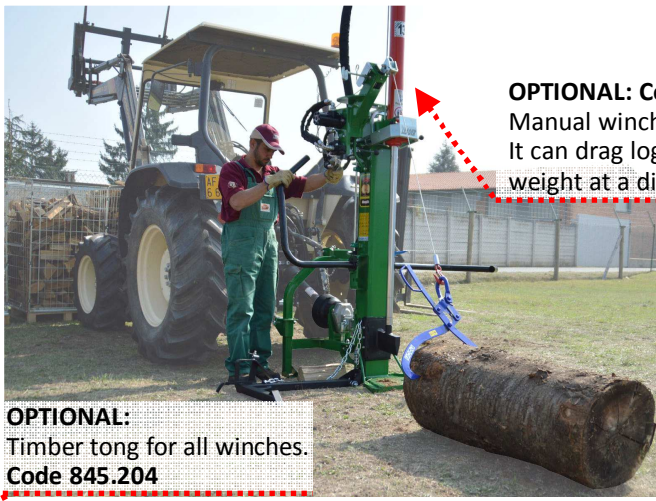

**OPTIONAL: Code 845.184.K**  
Manual winch (for V.PF model).  
It can drag logs up to 250 kg in weight at a distance of 20 meters.

**OPTIONAL:**  
Timber tong for all winches.  
Code 845.204

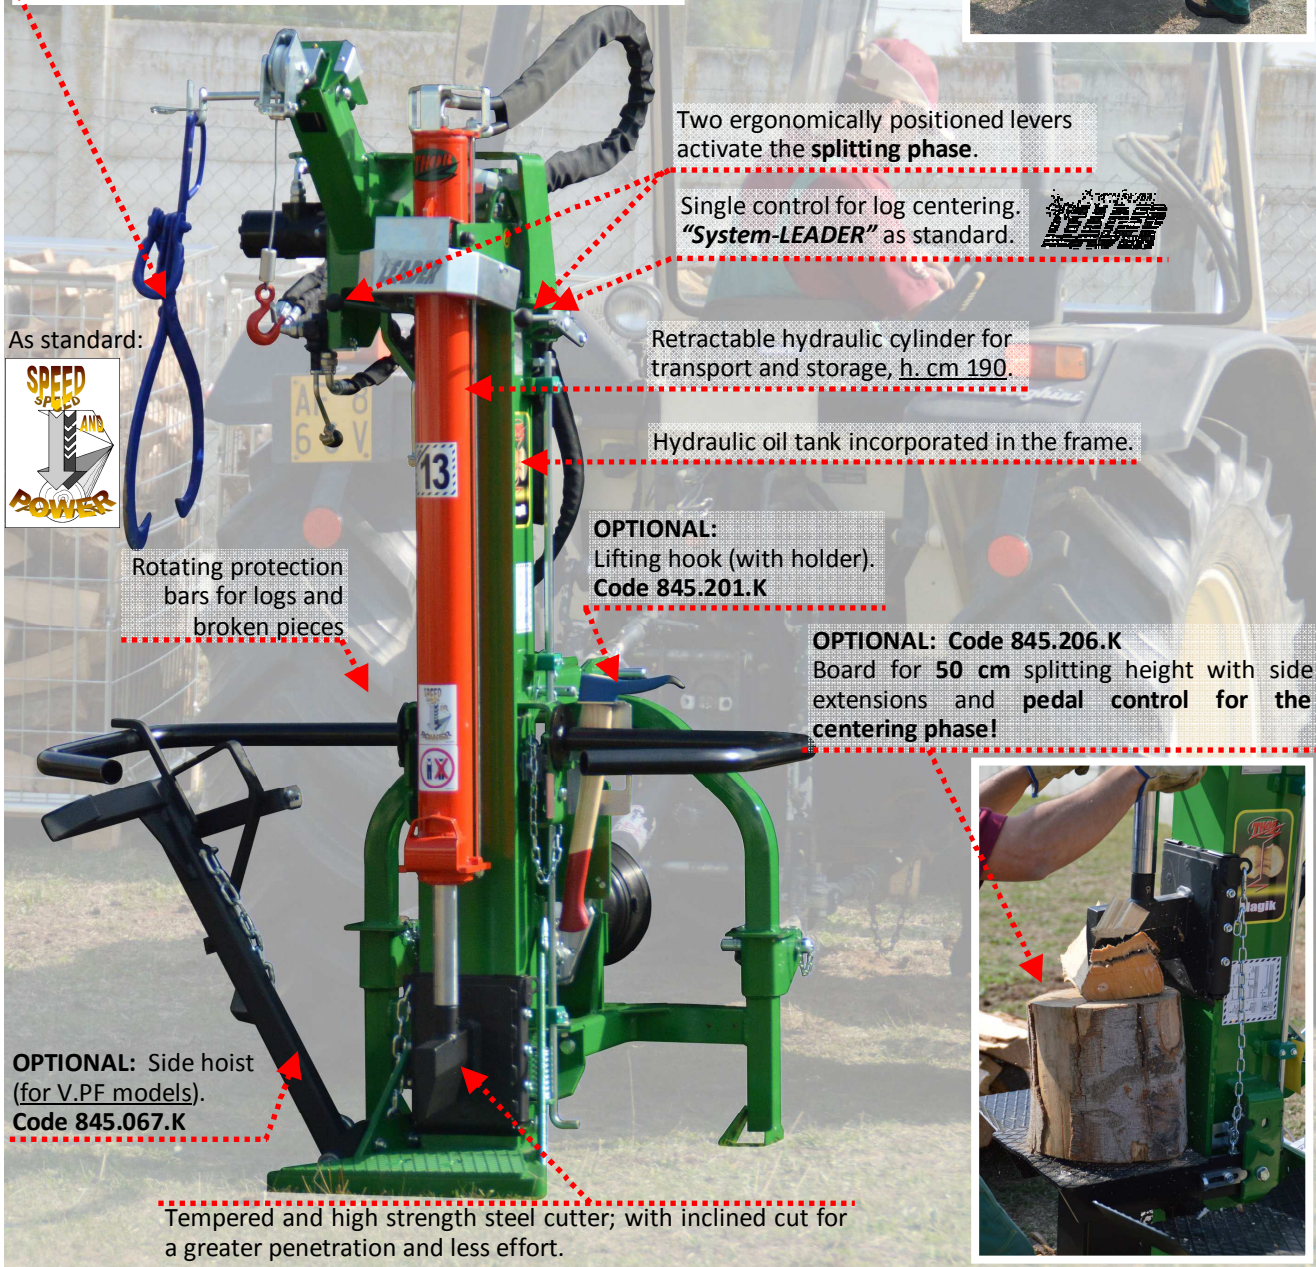

Two ergonomically positioned levers activate the **splitting phase**.

Single control for log centering. **"System-LEADER"** as standard.



As standard:



Retractable hydraulic cylinder for transport and storage, h. cm 190.

Hydraulic oil tank incorporated in the frame.

Rotating protection bars for logs and broken pieces

**OPTIONAL:**  
Lifting hook (with holder).  
Code 845.201.K

**OPTIONAL: Code 845.206.K**  
Board for 50 cm splitting height with side extensions and pedal control for the centering phase!

**OPTIONAL: Side hoist**  
(for V.PF models).  
Code 845.067.K

Tempered and high strength steel cutter; with inclined cut for a greater penetration and less effort.





# HYDRAULIC VERTICAL LOG SPLITTERS 13 Ton



Magik 13 EL

Vertical



Magik 13 Kombi

Vertical



Magik 13 VS

Vertical



**Pulling force**  
**250 kg.**



**Winch with manual control**  
**for V.PF models (tractor)**

Code	Description
845.184.K	for 13 Ton model

Model	Magik	Magik	Magik	Magik	Magik
Cutting force	13 Ton	13 Ton	13 Ton	13 Ton	13 Ton
Power supply <b>V.PF</b> = tractor <b>Kombi</b> <b>EL</b> = electric motor <b>VS</b> = petrol engine	<b>V.PF</b> 540 rpm	<b>EL</b> 230 Volt	<b>EL</b> 400 Volt	<b>Kombi</b> (EL 230 V + V.PF)	<b>VS</b> 3200 rpm
Power required (HP / kW)	22 / 16	3 / 2.2	5.5 / 4	5.5/4 – 22/16	9 / 6.7
Max. cutting height (cm)	124	124	124	124	124
Cutting capacity min - max (dia. cm)	5 - 70	5 - 70	5 - 70	5 - 70	5 - 70
Adjustable cutting stroke (cm)	120	120	120	120	120
Working pressure (bar) <i>PD = double pump</i>	260	250 / PD	250	250 / PD x EL	250 / PD
1 <sup>st</sup> cutting speed (cm/sec)	10.5	6.7	6.1	6.7 – 7.5	8
2 <sup>nd</sup> cutting speed (cm/sec)	34	21.4	19.5	21.4 – 24	25
Return speed (cm/sec)	15.7	10	9	10 – 11	11.5
Hydraulic oil tank capacity (lt)	22	22	22	22	22
Weight (kg)	328	330	330	356	340
Shipment dimensions (AxBxH cm)	80x120x190	80x120x190	80x120x190	80x120x190	80x120x190
Wheel size (ø mm) <i>pneumatic</i>	<input type="checkbox"/>	400	400	<input type="checkbox"/>	400
Transport trolley - full wheels 250 mm dia. <b>DO NOT use it with the side hoist</b>	optional 845.084.K	<input type="checkbox"/>	<input type="checkbox"/>	optional 845.084.K	<input type="checkbox"/>
"System-LEADER" control	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Board 54 cm with <b>pedal</b>	optional 845.206.K	optional 845.206.K	optional 845.206.K	optional 845.206.K	optional 845.206.K
Side hoist <b>DO NOT use it with the trolley</b>	optional 845.067.K	<input type="checkbox"/>	<input type="checkbox"/>	optional 845.067.K <i>(only for V.PF)</i>	<input type="checkbox"/>
Manual winch	optional 845.184.K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>List price exd. VAT (€)</b>					
<b>Net price excl. VAT (€)</b>					
★ = delivery time: 4 weeks					★
<b>Code</b>	<b>34.V.PF</b>	<b>34.223.PD</b>	<b>34.386</b>	<b>34.223.PD.K</b>	<b>34.VS.10.PD</b>

= NO     = YES

Available versions upon request = Kombi 13 ton model (EL 400 Volt +V.PF)

OPTIONAL ACCESSORIES								
Description	Lifting hook (with holder)	60° cutter	Cross cutter	Board 54 cm with pedal and extensions	Side hoist	Transport trolley	Cardan shaft	Chainsaw holder
Code	845.201.K	845.056.K	845.057.K	845.206.K	845.067.K	845.084.K	600.059	845.202.K