



Models:



# A cheap, simple and reliable choice!

## Log splitters for agricultural-forestry use.

Different versions are available:

- with detached PTO pump (HVP);
- with fixed PTO pump (V.PF);
- with electrical motors (230 Volt).

Hydraulic cylinder retractable for transport and storage.


Manual or remote controlled winch.

They can drag logs up to 250 kg (Farmer) or 400 kg (Farmer-Diavolik) in weight at a distance of 20 meters.

**OPTIONAL:**

Timber tong.

Code 845.204

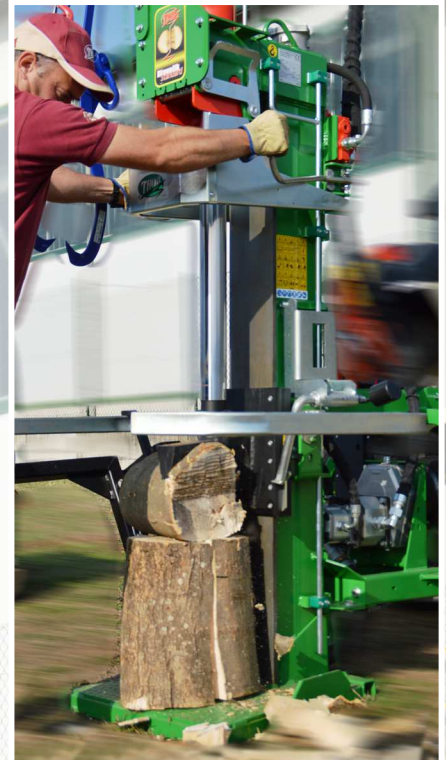

Two ergonomically positioned control levers activate the **splitting phase**.

Hydraulic oil tank in the frame for the 13, 15 and 25 Ton models.  
External hydraulic oil tank for the 18 and 30 Ton models.

**OPTIONAL:** Chainsaw holder.  
Code 845.202.K

**OPTIONAL:**

Side hoist  
(only for V.PF models).

Log centering pendulum model Farmer-Diavolik.

Rotating protection bars for logs and broken pieces.

**TRANSPORT:**

3-point connector  
1<sup>st</sup> – 2<sup>nd</sup> cat.

Tempered and high strength steel cutter for the Farmer-Diavolik model, with a length of 30 cm and a 6° inclined cut for a greater penetration and less effort.

Interchangeable, bolted, cast iron GS400 cutter guides for the Farmer-Diavolik model.  
Self-lubricating, interchangeable Teflon cutter guides for the Farmer model.

# HYDRAULIC VERTICAL LOG SPLITTERS 13/ 15/ 18/ 25/ 30 Ton



Farmer 13 EL

Farmer 13 HVP

Farmer 15 V.PF

FarmerDiavolik 30 V.PF



<b>Pulling force:</b> 250 Kg. (Farmer) 400 Kg. (FarmerDiavolik)	
	<b>Manual winch</b> Code 845.159.K for 13/15 Ton 891.021.K for 25/30 Ton
<b>Remote controlled winch</b> Code 891.018.K for 25/30 Ton	
<b>Timber tong for all winches</b> Code 845.204	

Model	Farmer	Farmer	Farmer	Farmer	FarmerDiavolik	FarmerDiavolik
Cutting force	13 Ton	13 Ton	15 Ton	18 Ton	25 Ton	30 Ton
Power supply <i>EL</i> = electric motor, <i>HVP / V.PF</i> = tractor	EL 230 Volt	HVP 540 rpm	V.PF 540 rpm	V.PF 540 rpm	V.PF 540 rpm	V.PF 540 rpm
Power required (HP / kW)	3 / 2.2	23 / 17	23 / 17	25 / 18	46 / 34	50 / 37
Max. cutting height (cm)	107	107	107	107	124	124
Cutting stroke (cm)	100	100	100	100	120	120
Working pressure (bar) <i>PD = double pump</i>	260 / PD	260	250	280	260	315
1 <sup>st</sup> cutting speed (cm/sec)	6.7	10.7	8.5	8.5	20.2	20.2
2 <sup>nd</sup> cutting speed (cm/sec)	21.4	34	19.1	19.1	9.4	9.4
Return speed (cm/sec)	10	15.7	15.3	15.3	17.5	17.5
Hydraulic oil tank capacity (lt)	22	22	22	37	38	85
Weight (kg)	290	245	275	360	580	630
Shipment dimensions (AxBxH cm)	80x120x210	80x60x210	80x120x210	80x120x210	80x120x230	80x120x230
STANDARD dual working controls (NO pedal!)	●	●	●	●	●	●
Wheel size (dia. mm) <i>pneumatic</i>	400	□	□	□	□	□
Side hoist <b>DO NOT use it with the trolley</b>	□	optional 845.067.K	optional 845.067.K	optional 845.067.K	optional 891.019.K	optional 891.019.K
Log centering pendulum	□	□	□	□	●	●
54 cm cutting board	optional 845.207.K	optional 845.207.K	optional 845.207.K	optional 845.207.K	optional 891.017.K	optional 891.017.K
Manual or remote controlled winch	□	optional 845.159.K	optional 845.159.K	<u>included</u> 845.159.K	optional	optional
<b>List price excl. VAT (€)</b>						
<b>Net price excl. VAT (€)</b>						
★ = delivery time: 4 weeks			★			★
<b>Code</b>	<b>37.L.223.PD</b>	<b>37.L.HVP</b>	<b>39.V.PF</b>	<b>39.B.V.PF</b>	<b>45.C.V.PF</b>	<b>45.V.PF</b>

□ = NO ● = YES

OPTIONAL ACCESSORIES										
Description	60° cutter	Farmer 13	Farmer 15/18	Lifting hook (with holder)	Farmer V.PF	Farmer-Diavolik V.PF	Farmer 15	Cardan shaft	Farmer	Farmer-Diavolik
Code	845.056.K	845.057.K	845.086.K	845.201.K	845.067.K	891.019.K	845.084.K	600.059	845.207.K	891.017.K