



Models: **MAK** **Modeli** **with** **System LEADER**

These models can work in both vertical and horizontal position.

They are available with electric motors 400 Volt and with 9 and 13 Hp petrol engines.



For the horizontal cut two side guides are mounted for centering the log.

Type-tested tow-hook for dia. 50 sphere.

Lighting bar for road transport.

Hydraulic cylinder with a unique position for transport and for work.

Single control for log centering. "System-LEADER" as standard for vertical position.

Ergonomically-positioned dual controls for the splitting stage.

Interchangeable self-lubricating teflon guides.

Special steel cutter with inclined cut for greater penetration and less effort.

With the "System-LEADER" controls you can carry out the cutter approach stage and center the logs with your hands free (if you use the board you can use the pedal tool!). Once the log has been centered and clamped in the desired position, the two control levers are used in order to carry out the splitting operation.

Rotating protection bars for logs and broken pieces in vertical position.

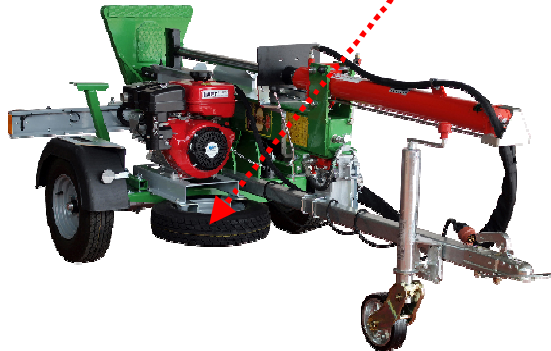
Double speed as standard.




ABS mudguards.







OPTIONAL: Spare tyre.
Code 845.157.K



Model	Magik Multiuse	Magik Multiuse
Cutting force	16 Ton	16 Ton
Power supply VS = petrol engine, EL = electric motor	EL 400 Volt	VS 3200 rpm
Power required (HP / kW)	5,5 / 4	9 / 6,7
Cutting capacity max. (dia. cm)	80	80
Max. vertical cutting height (cm)	110	110
Max. horizontal cutting length (cm)	42 – 74	42 – 74
Adjustable cutting stroke (cm)	105 ●	105 ●
Working pressure (bar) PD = double pump	250	250 /PD
1 st cutting speed (cm/sec)	6,1	6,3
2 nd cutting speed (cm/sec)	13,5	14,1
Return speed (cm/sec)	9	11
Hydraulic oil tank capacity (lt)	23	23
Weight (kg)	480	490
Shipment dimensions (AxBxH cm)	120x120x190	120x120x190
Wheel size (mm dia.) pneumatic	4.50.10.C	4.50.10.C
“System-LEADER” control	● for vertical position	● for vertical position
Board with estensions and pedal 	optional 845.206.K	optional 845.206.K
Manual winch	<input type="checkbox"/>	<input type="checkbox"/>
List price excl. VAT (€)		
Net price excl. VAT (€)		
★ = delivery time: 4 weeks	★	★
Code	36.CM.386	36.CM.VS.10.PD

= NO ● = YES

OPTIONAL ACCESSORIES				
Description	Digital counter	Lifting hook	Spare tyre	Board with pedal and extensions <i>(for vertical position)</i>
Code	400.113.K	845.201	845.157.K	845.206.K